


WS1 AT CORNERS, TEE
JUNCTION, WALL ENDS AND
AT MAX SPACING NOTED.

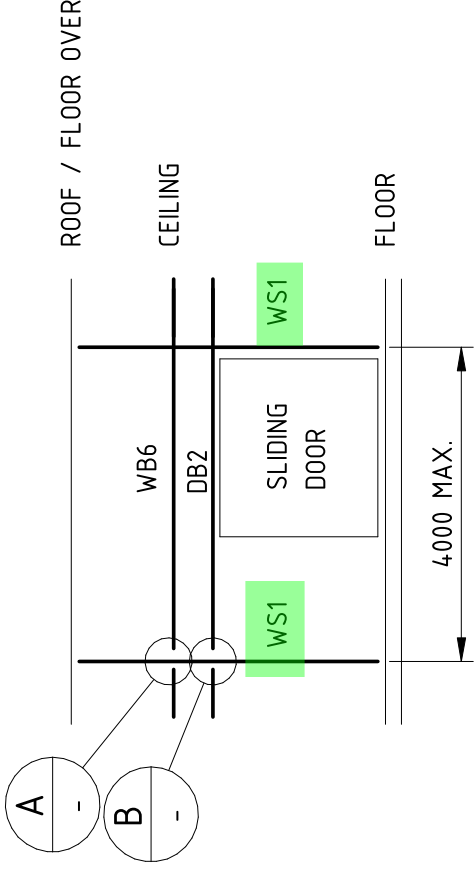

AT STUD WALLS


1mm ALL AROUND GAP

AT SLIDING DOORS


TYPICAL ELEVATIONS - INTERNAL WALLS

WALL STIFFENERS	WS1	89 x 89 x 6 SHS	G
WALL BEAMS	WB6	89 x 89 x 6 SHS	G
	DB2	180 PFC	G

150 PFC.
8 END PL. + 4 M12 8.8/S
BOLTS EACH END.

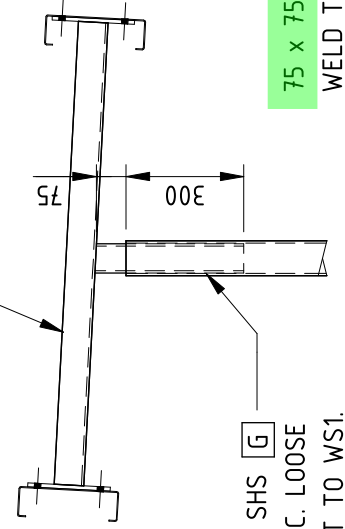

AT ROOF

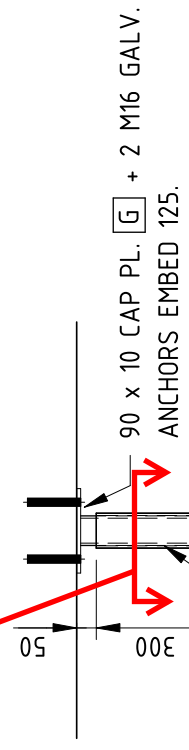

AT FLOOR OVER